

## INSULATED AQUATEMP™ HOT CABINET H-135-W A SERIES

### FEATURES AND BENEFITS:

- Fully insulated holding cabinet keeps prepared foods at serving temperatures.
- Powerful, yet efficient, 1500 Watt heating system maintains the right combination of heat and humidity to properly hold products.
- Humidity system allows you to regulate humidity levels by controlling air temperatures to 200°F (93°C). Lowering air temperatures allows for humidity up to 95%
- Internal frame in body maintains structural rigidity.
- Body constructed of corrosion resistant, magnetic stainless steel for strength and ease of cleaning.
- Insulated doors prevent temperature loss; door gaskets for proper seal. Field reversible for flexibility.
- Standard with right hand hinging; left hand hinging available upon request.
- Recessed push/pull handles on both sides prevent damage to walls; allows easy maneuvering.
- Models available:
  - Full Size model H-135-WSUA-11A has eleven sets of universal angles.
  - Half Size model H-135-WSUA6A has six sets of universal angles.
- Chrome plated wire universal angles accommodate a large variety of pans sizes on adjustable 1-1/2" centers.
- Slanted control panel has easy-to-read thermometer; digital thermometer available upon request.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.




H-135-WSUA-11A

### ACCESSORIES and OPTIONS (Available at extra cost):

- Full View Window Door
  - Red Powder Coat Doors
  - Extra Universal Angles
  - Corner Bumpers
  - Perimeter Bumper
  - 208 or 240 Volt Service
  - Food Safe Digital Thermometer
- See page B-30 for accessory details.

# H-135-W A Series

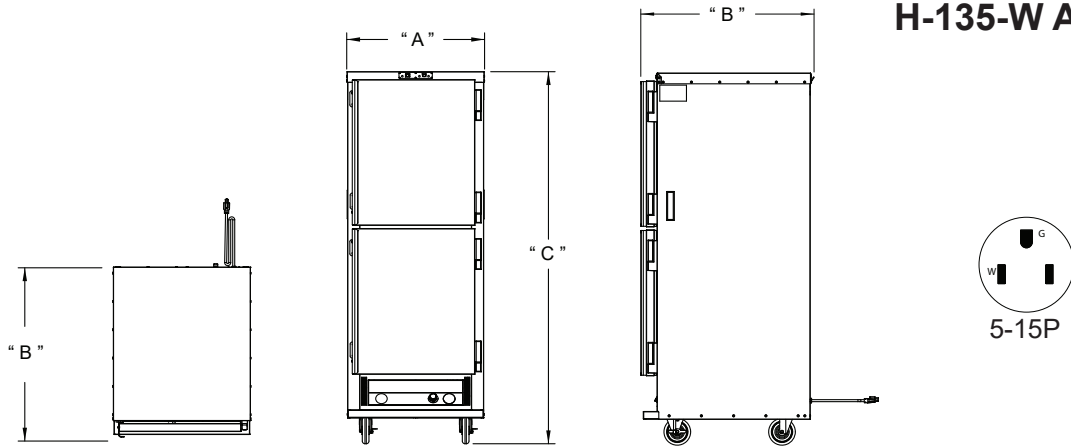

| CRES COR MODEL NO. | PAN        |                |    | DIM "A" | DIM "B" | DIM "C" | INSIDE DIMENSIONS |        |        |     | WEIGHT ACT. |
|--------------------|------------|----------------|----|---------|---------|---------|-------------------|--------|--------|-----|-------------|
|                    | CAP/ANGLES | SIZE           |    | WIDTH   | DEPTH   | HEIGHT  | WIDTH             | DEPTH  | HEIGHT |     |             |
| H-135-WSUA-6A      | 6 SETS     | SEE NOTE BELOW | IN | 25-7/8  | 32-1/2  | 41-3/4  | 22                | 26-3/8 | 25-7/8 | LBS | 205         |
|                    |            |                | MM | 657     | 826     | 1060    | 559               | 670    | 657    | KG  | 93          |
| H-135-WSUA-11A     | 11 SETS    | SEE NOTE BELOW | IN | 25-7/8  | 32-1/2  | 69-3/4  | 22                | 26-3/8 | 54     | LBS | 300         |
|                    |            |                | MM | 657     | 826     | 1775    | 559               | 670    | 1375   | KG  | 136         |

NOTES: 1. Pan sizes 22" x 20" (560 x 510) Roast & Bake Pans, 10" x 20" (255 x 510) Roast & Bake Pans, 18" x 26" (460 x 660) Bun Pans, 14" x 18" (355 x 460) Service Trays, 12" x 20" (305 x 510) Steam Table Pans. Refer to Pan Size Chart at end of section.  
 2. When ordering bumpers, add 2" to overall dimensions.

### CABINET:

- Body: 22 ga. stainless steel.
- Reinforcement: Internal framework of 20 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F, 1" insulation in sidewalls and doors, 1-1/2" in top and back.
- Air tunnel: 22 ga. stainless steel; lift-out type, mounted on back panel.
- Push/pull handles (2): Black plastic; 5-1/2" vertical; recessed.

### BASE:

- Full base construction, 16 ga. stainless steel.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -40°/+180°F. Delrin bearings. Front casters equipped with brakes.

### DUTCH DOORS:

- Field reversible.
- Formed 20 ga. stainless steel.
- Gaskets: Perimeter type, silicone rubber.
- Latches: Magnetic type with stainless steel pull handle.
- Hinges (4): Self-closing.

### PAN SLIDES:

- Wire angles (.306 dia.) nickel chrome plated steel, mounted on lift off posts.
- Spaced on 4-1/2" centers; adjustable on 1-1/2" centers.

### HOT UNIT COMPONENTS:

- Thermostat (holding): Electro-mechanical, room ambient to 200°F (93°C).
- Thermostat (humidity): Electro-mechanical, room ambient to 95%.
- Power cord: Permanent, 14/3 ga.
- Heaters (2): 750 Watts for holding.
- Blower motor.
- Thermometer.
- Water pan: 3-1/2 quart; 22 ga. 304 stainless steel with 750 Watt heater for humidity.

### POWER REQUIREMENTS:

- 1500 Watts, 120 Volts, 60 Hz., single phase, 12 Amps., 15 Amp. service.

### SHORT FORM SPECIFICATIONS

Cres Cor Insulated Holding Cabinet Model H-135-WSUA-\_\_A. Inner, outer and top liners of 22 ga. stainless steel. (\_\_\_) sets wire universal angles for multiple pan sizes, adjustable spacing every 1-1/2". Field reversible Dutch doors, 20 ga. stainless steel. Insulated with 1-1/2" fiberglass in top and doors, 1" in sidewalls and back. 1500 Watt, 120 Volt power unit. Full base, 16 ga. stainless steel. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_ CSA-US, CSA-C, CSA to NSF4 listed.



Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Customer Service.

If you need a QR reader visit your App Store on your Smartphone or Tablet.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2018 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Made in America Since 1936