


Product Comparison

Are you comparing
Apples



to Apples?

Cres Cor H-137-WSUA-12D-15A	Metro C599L-SDS-U	Cres Cor Advantage
CAPACITY: (12) 18" x 26" or (24) 12" x 20" pans, 12 sets of 3/16" 18 ga. stainless steel wire universal angles adjustable on 1-1/2" centers.	CAPACITY: (18) 18" x 26" or (34) 12" x 20" pans, 18 sets of 1/4" nickel chrome wire universal angles on 1-1/2" centers.	Heavy duty solid stainless steel angles won't rust or break.
BODY CONSTRUCTION: 22 ga. stainless steel body with stainless steel internal frame. (2) Recessed push pull handles. Interior coved corners. 1-1/2" fiberglass in back, doors and bottom, 2" in sidewalls.	BODY CONSTRUCTION: 20 ga. stainless steel body. (4) Recessed push pull handles. 2-1/2" fiberglass full perimeter.	Cres Cor has a strong internal frame for structure and securing hardware. Coved corners are easier to clean and sanitize.
WATER PAN: 4 gal. water reservoir with drain.	WATER PAN: 4.5 gal. water reservoir with drain.	
DOOR: 22 ga. stainless steel dutch doors Field reversible Anti-microbial ceramic magnetic pull latch Self-closing, lift-off hinges of heavy duty steel. Silicone door gaskets	DOOR: Fully insulated double-panel construction. Field reversible. Chrome plated magnetic pull latch. Self-closing, lift-off hinges. Santoprene door gaskets.	Anti-microbial latches protect against spreading germs. Silicone door gaskets prevent temperature loss with proper seal.
CASTERS: 5" dia. swivel modulus, two with brakes.	CASTERS: 5" dia. donut neoprene, two with brakes.	High modulus wheel for quiet rolling and shock absorption on uneven or rough surfaces.
CONTROLS: Digital LED solid state controls top mounted. Lighted on/off push button	CONTROLS: Digital LED solid state controls top mounted. Lighted on/off rocker switch.	Easy to read LED display with more reliable push button power button.
ELECTRICAL: 1500 Watts, 120 Volts, 60 Hz., 1 PH, 15 Amp. 10' 12/3 ga. NEMA 5-15P plug NSF, CSA-US, CSA-C listed	ELECTRICAL: 1440 Watts, 120 Volt, 60 Hz., 1 PH, 12 Amp. 7-1/2' NEMA 5-15P plug NSF, CSA-US, CSA-C listed	Quick to reheat after door opening, and longer cord gives more room for access while cabinet is plugged in.
ENERGY STAR QUALIFIED: YES	ENERGY STAR QUALIFIED: NO	Energy Star Qualified equipment helps save money and protect our climate through superior energy efficiency.
EXTERIOR DIMENSIONS: 28-1/4"W x 32-3/4"D x 73-1/2"H	EXTERIOR DIMENSIONS: 29"W x 31"D x 74-3/4"H	
SHIP WEIGHT: 400 lbs.	SHIP WEIGHT: 410 lbs.	
WARRANTY: 3-Year Parts, 1-Year Labor 5-Year parts for K-12 schools	WARRANTY: 1-Year	Warranty is 3x longer on parts coverage and 5x better for K-12 schools!
December, 2017 List Price: \$8,756	January, 2017 List Price: \$10,601	Cres Cor even costs less!

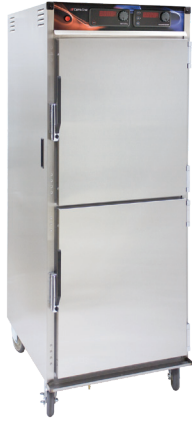

Product Comparison

Are you comparing
Apples



to Apples?

Cres Cor H-137-WSUA-12D-15A	Winston HL-4522 CVAP®	Cres Cor Advantage
CAPACITY: (12) 18" x 26" or (24) 12" x 20" pans, 12 sets of 3/16" 18 ga. stainless steel wire universal angles adjustable on 1-1/2" centers.	CAPACITY: Standard with 14 sets of wire angles, spaced on 3-1/2" centers, adjustable.	Heavy duty solid stainless steel angles won't rust or break. More capacity potential.
BODY CONSTRUCTION: Inner body 18 ga. stainless steel. Exterior of 22 ga. stainless steel. Internal frame of 18 ga. stainless steel. Smooth interior, coved corners; both vertical and horizontal.	BODY CONSTRUCTION: Commercial and institutional grade stainless steel interior and exterior. No coved corners to prevent food particle/grease build-up.	Cres Cor has a strong internal frame for structure and securing hardware. Coved corners are easier to clean and sanitize.
WATER PAN: 4 gal. water reservoir with drain.	WATER PAN: 3 gal. w/drain	More water capacity
INSULATION: 2" insulated sidewalls, 1-1/2" insulation in doors, top and base.	INSULATION: Full-perimeter	Cres Cor has better insulation in body to retain more heat.
DOOR: 22 ga. stainless steel dutch doors Field reversible. Anti-microbial ceramic magnetic pull latch Self-closing, lift-off hinges of heavy duty steel. Silicone door gaskets.	DOOR: Field reversible, lifts off for cleaning; magnetic door handle.	Anti-microbial latches protect against spreading germs. Silicone door gaskets prevent temperature loss with proper seal.
CASTERS: Standard with 5" swivel casters, 1-1/4" wide, front casters with brakes.	CASTERS: Standard with 3" casters, two with brakes. (5" casters available at additional cost)	5" casters provide ease and mobility when fully loaded.
CONTROLS: Dual LED digital temperature display. Control heat and humidity separately. Controls top mounted. Lighted on/off push button.	CONTROLS: Digital LED Electronic differential control with dials labeled Food Temperature and Food Texture. Utilizes Controlled Vapor Technology. Top mounted controls.	Easy to read LED display with more reliable push button power button.
ELECTRICAL: 1500 Watts, 120 Volts, 60 Hz., 1 PH, 15 Amp. 10' Power cord with 12/3 ga. NEMA 5-15P plug NSF, CSA-US, CSA-C listed	ELECTRICAL: 1730 Watts, 120 Volt, 60 Hz., 1 PH, 15 Amp. 7' Power cord NEMA 5-15P Plug NSF, CSA-US, CSA-C listed	Both 15 Amp service. Longer cord gives more room for access while cabinet is plugged in.
ENERGY STAR QUALIFIED: YES	ENERGY STAR QUALIFIED: NO	Energy Star Qualified equipment helps save money and protect our climate through superior energy efficiency.
EXTERIOR DIMENSIONS: 28-1/4"W x 32-3/4"D x 73-1/2"H	EXTERIOR DIMENSIONS: 29"W x 31"D x 74-3/4"H	
SHIP WEIGHT: 400 lbs.	SHIP WEIGHT: 420 lbs.	
WARRANTY: 3-Year Parts, 1-Year Labor 5-Year parts for K-12 schools	WARRANTY: Limited 1-Year Warranty (excluding gaskets, lamps, hoses, power cords, glass panels and evaporators)	Warranty is 3x longer on parts coverage and 5x better for K-12 schools!
December, 2017 List Price: \$8,756	January, 2017 List Price: \$9,985	Cres Cor even costs less!