

NON-INSULATED CANNED FUEL CABINET MODEL 102-ST-1841E

FEATURES AND BENEFITS:

- Versatile cabinet transports and holds hot or cold foods.
- Same size top and base extend past sidewalls to act as natural bumpers for protection. Extruded frame fully welded.
- Bottom pan cutouts securely hold three standard 7-ounce size cans of fuel. Generates heat to 180°F (82°C).
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility.
- Reinforced, full length door swings 270° and can be latched to the cabinet side for convenience. Door vents adjust to regulate air flow.
- Gravity type latch secures door during transport.
- Corrugated sidewalls hold 18" x 26" pans on 1-1/2" centers securely in place. Provides added strength.
- Interior pan stops on door and back allow proper air flow.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.



102-ST-1841E
(Pans not included)




ACCESSORIES and OPTIONS (Available at extra cost):

- Door Thermometer
- Lock Hasp
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- Floor Lock (for use with 5" casters)
- Push Handle
- Left-Hand Hinged Door
- Kold Keepers

See page A-20 for accessory details.

102-ST-1841E

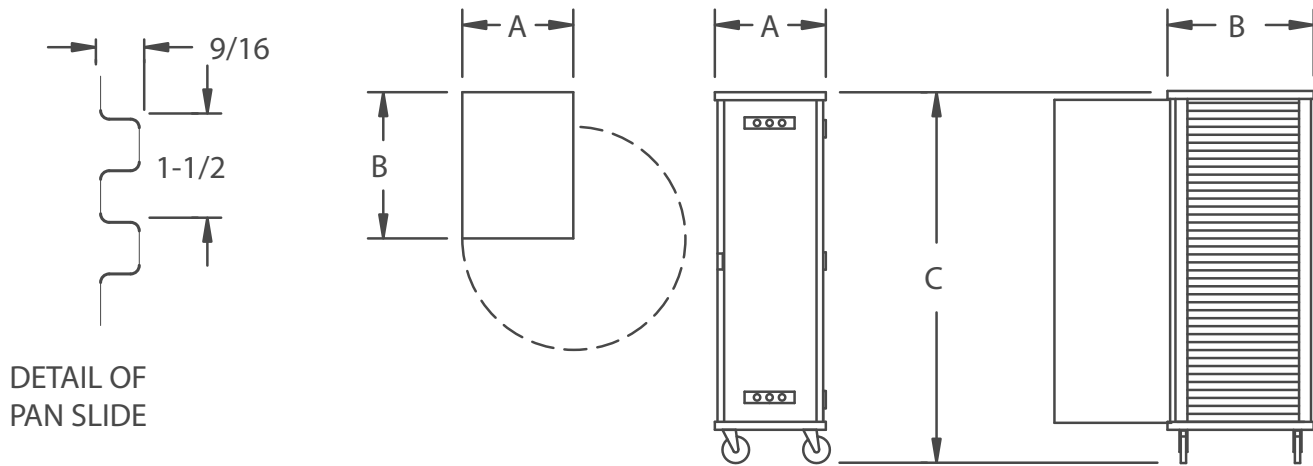

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
102-ST-1841E	38	18 X 26	IN	20-7/8	28-1/2	69-3/4	18-1/16	26-5/8	61-1/2	LBS	125
		460 X 660	MM	530	724	1775	460	676	1565	KG	57

NOTE: Send sample pan or tray with order when using any that are not an 18" x 26" pan with heavy beaded edge. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:

- Posts: Extruded channels, 7/8 x 2-1/4 x .102, welded to top and base, form a solid frame.
- Sides: .063 corrugations riveted to posts.
- SUPER DUTY back panel: Fitted into posts, riveted to top and reinforced with additional bracing.
- Tie rod: Applied at front.
- Top: One piece .100 aluminum.
- Pan stop channels: Mounted to inside rear of cabinet and door.
- Removable canned fuel holding tray holds three standard 7 oz. cans of fuel.

BASE:

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

DOOR:

- Panel: .063 aluminum with adjustable vents fitted into door stile extrusions, 3/4 x 1-7/16 x .187.
- Reinforcement: 1/4 x 1-1/2 extruded bars riveted and welded horizontally.
- Latch: Gravity type, nickel plated steel.
- Swings 270° on 3 butt hinges, riveted to posts and stiles.

PAN SLIDES:

- Corrugations act as pan slides on 1-1/2" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Canned Fuel Cabinet Model 102-ST-1841E. Formed and welded .100 aluminum top, .190 aluminum base. No-tip .063 corrugated aluminum sides for (38) 18" x 26" pans on 1-1/2" centers. Vented .063 aluminum door, full frame welded construction. Removable canned fuel holding tray holds (3) 7 oz. cans. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 1-Year Parts / 90-Day Labor warranty. Provide the following accessories: _____
_____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.