


SUPER DUTY ANGLE LEDGE UTILITY RACK 207-1820-SD

FEATURES AND BENEFITS:

- Super duty utility rack for transport and storage of products on 18" x 26" pans and 14" x 18" trays. Also available for 15" x 20" trays.
- Fully welded framework of structural aluminum extrusions for rigidity and durability. Reinforced for rough handling.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Extruded angle ledge pan supports. Each is welded in place to withstand heavier loads. Bottom of pan or tray rests on angle ledges. See reverse side for capacity and pan spacing.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

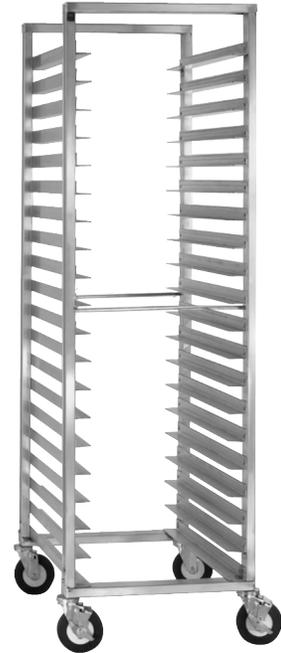

207-1820-SD




ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper

See page G-36 for accessory details.



207-1820-SD Series

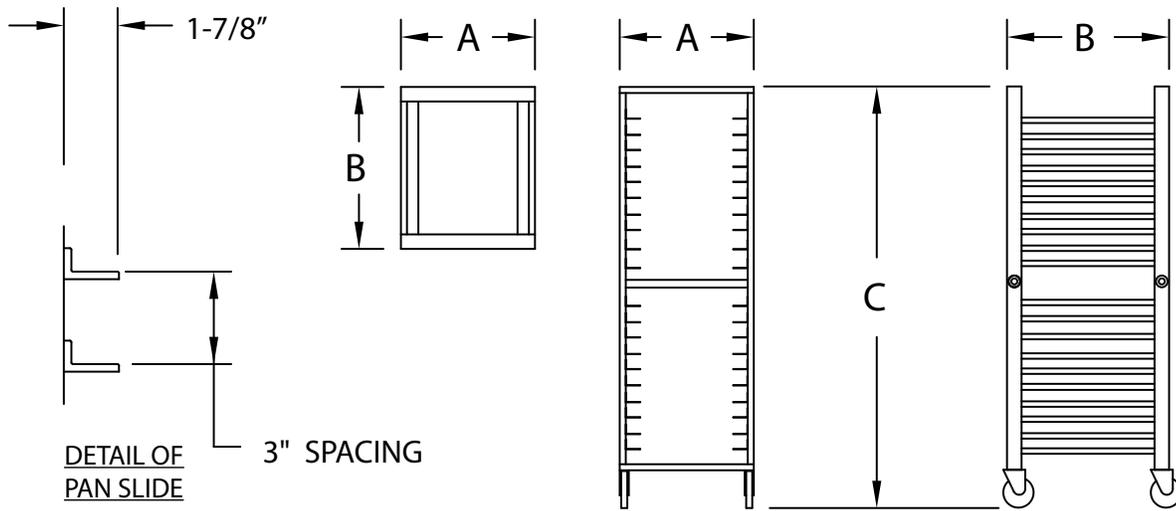

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
207-1820-SD	20	18 x 26	IN	22	29-5/8	69-3/4	18-3/8	28-7/8	61-1/2	LBS	75
		460 x 660	MM	560	755	1775	470	735	1565	KG	34

When ordering bumpers, add 2" to overall dimensions.

ALL CONSTRUCTION IS WELDED AND FINISHED.



Gold indicates our Best Rack with the best warranty in the industry.
3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Super Duty Tie Rods (2): Welded to front and back.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Sealed bearings. Two casters equipped with brakes.

PAN SLIDES:

- Extruded angles, 1-7/16 x 1-7/8 x .102; welded to posts on 3" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Utility Rack Model 207-1820-SD. Extruded aluminum welded construction with angles and (2) tie rods welded. Capacity (20) 18" x 26" pans on 3" centers. 5" swivel modulus casters, sealed bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories: _____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.