

EXTRUDED SIDEWALL PAN DRYING RACK MODEL 252-DR-36

FEATURES AND BENEFITS:

- Durable pan drying rack for drying and transport of (36) 18" x 26" pans.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Easy to clean; interlocking, extruded sidewalls hold pans on 1-1/2" centers. Provides added strength.
- Offers complete flexibility for operator's selection of pan spacing.
- Supplied with three raised wire grids.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.




252-DR-36



ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.

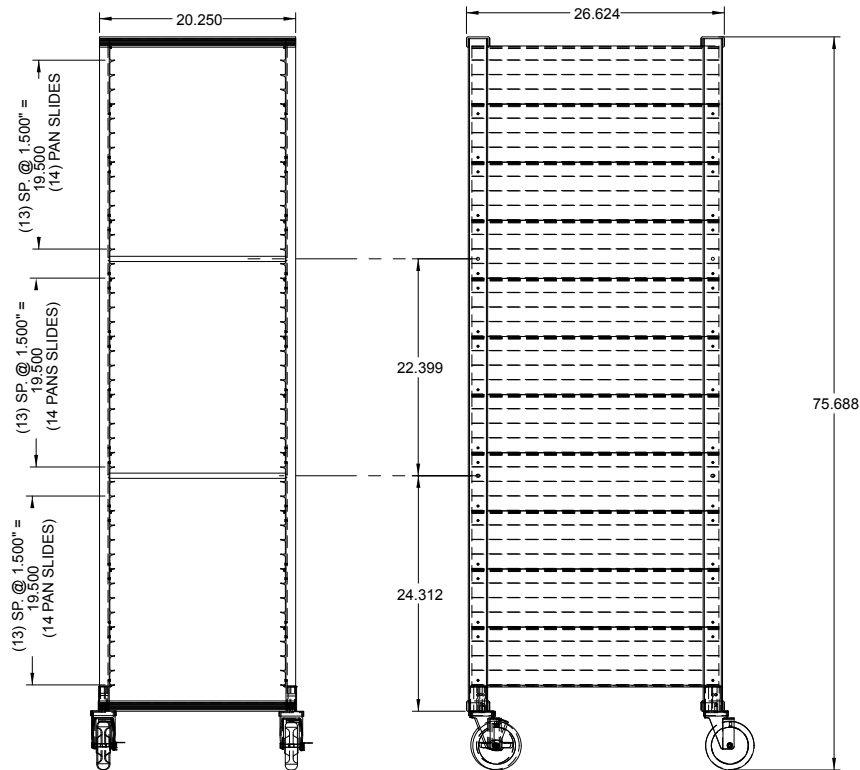

| CRES COR MODEL NO. | PAN | | | DIM "A" | DIM "B" | DIM "C" | INSIDE DIMENSIONS | | | WEIGHT ACT. | |
|--------------------|-----|-----------|----|---------|---------|----------|-------------------|-------|--------|-------------|----|
| | CAP | SIZE | | WIDTH | DEPTH | HEIGHT | WIDTH | DEPTH | HEIGHT | | |
| 252-DR-36 | 36 | 18 X 26 | IN | 21-5/16 | 26-5/8 | 75-11/16 | 18-1/8 | 26 | 67-1/2 | LBS | 70 |
| | | 460 X 660 | MM | 560 | 680 | 1922 | 460 | 660 | 1715 | KG | 32 |

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded channels, 1 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (4): Two front and back; 5/16 dia. steel rods enclosed in aluminum tubing, fastened to posts.
- Sides: Interlocking extruded 6" panels, smooth outer sides; riveted to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs., temp. range: -45°+180°F. Delrin bearings.
- Two casters equipped with brakes.

PAN SLIDES:

- Eleven 6" extruded interlocking side wall panels act as pan slides on 1-1/2" centers.
- Holds (36) 18" x 26" bun pans vertically.
- Grids (3): Nickel chrome plated steel, raised wire 17" x 25".

SHORT FORM SPECIFICATIONS

Cres Cor Pan Drying Rack Model 252-DR-36. Extruded aluminum welded construction. Tie rods (2) applied at front and rear. Interlocking extruded sides for drying (36) 18" x 26" pans. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: _____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2013 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.