

HOTCUBE¹™ INSULATED OUTDOOR HOT CABINET MODEL HC1-UA-11 (PATENT PENDING)

ADDITIONAL FEATURES AND BENEFITS:

- Industry's first line of propane heated hot cabinets allowing you to hold food safely **outdoors***.
- Fully insulated holding cabinet keeps prepared foods at proper serving temperatures easily.
- Powerful, yet efficient, proprietary propane heating system maintains the right temperature to properly hold foods utilizing 8700 BTU's of heat. Safely hold up to 200°F (93°C).
- Ample capacity to hold up to 22 steam table pans or 11 sheet pans.
- Utilizes standard 1 lb. propane tanks for up to 8 hours of hold time. Also approved for 20 lb. tank use for longer hold periods.
- Heavy duty 8" pneumatic swivel casters, two with brakes. Rear casters are fixed to provides mobility when fully loaded, and stability during transport even in tough outdoor conditions.
- Easy visual sight glass to see propane flame.
- Piezo ignition system.
- Available body and rail custom colors or add a vinyl or magnetic door with your logo!

**HotCube¹**


HC1-UA-11



ACCESSORIES and OPTIONS (Available at extra cost):

- 20 lb. Hose Adapter
- Door Window
- Customized Logos/Powder Coating
- Fitted Storage Tray
- Extra Heavy Duty Transport Angles
- Wire Grids
- 6" Hi-Modulus Casters

See page B-20 for accessory details.

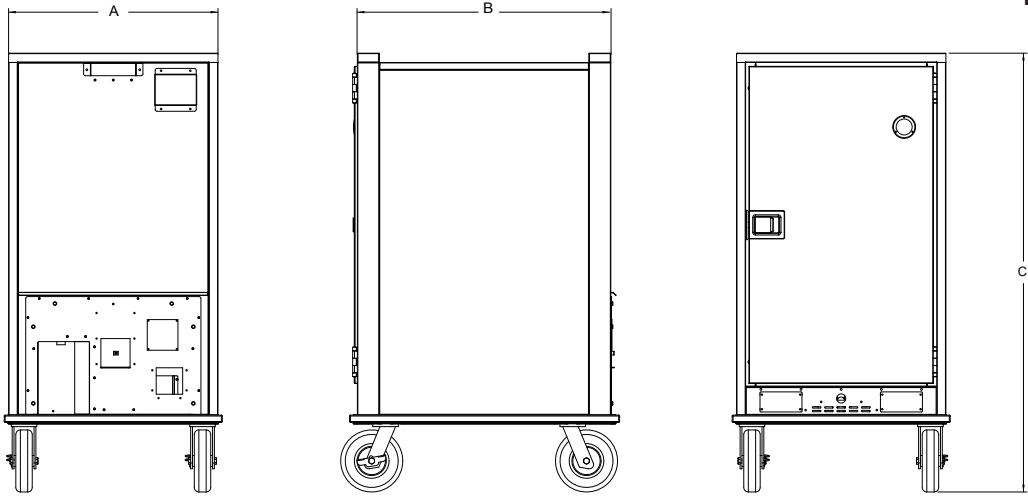

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
HC1-UA-11	11 SETS	SEE NOTE BELOW	IN	28-3/4		60-1/8	22	27	42	LBS	468
			MM				560	690	1070	KG	212

NOTES: 1. Pan sizes 22" x 20" (560 x 510) Roast & Bake Pans, 10" x 20" (255 x 510) Roast & Bake Pans, 18" x 26" (460 x 660) Bun Pans, 14" x 18" (355 x 460) Service Trays, 12" x 20" (305 x 510) Steam Table Pans.
Refer to Pan Size Chart at end of section.

ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:

- Inner body: 20 ga. stainless steel.
- Outer body: .063 aluminum, powder coated red.
- Reinforcement: Internal framework of 18 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in door, back, top and sidewalls.
- Push/pull handles (2) powder coated black.
- 1-1/4" Sight glass for flame detection.

BASE:

- One piece construction, .060 stainless steel.
- Casters: 8" dia., (2) swivel (2) fixed, never flat, load cap. 310 lbs. each, Double ball bearings. Front casters equipped with brakes.

DOOR:

- Formed 22 ga. stainless steel.
- Latches: Polished stainless steel, slam type; mounted inboard.
- Gasket: Perimeter type.
- Thermometer: Analog.

PAN SLIDES:

- Wire angles (.306 dia.), nickel chrome plated steel, mounted on lift-off posts.
- Spaced on 3" centers; adjustable on 1-1/2" centers.

HOT UNIT COMPONENTS:

- Propane powered heating system.
- Burner: 8700 BTU's
- Thermostat: 140°F to 200°F.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Hot Cabinet Model HC1-UA-11 outer of .063 aluminum, stainless steel internal frame. (11) sets wire universal angles for multiple pan sizes, adjustable spacing every 1-1/2". Inner body stainless steel. Fiberglass insulation in sides; doors, back, top, and sidewalls 1-1/2". Interior coved corners. Hose out cleaning capability. One piece base, stainless steel. 8" swivel pneumatic casters, Double ball bearings, two with brakes. Load capacity 310 lbs. each. 2 year parts warranty. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: _____.
CSA-US, CSA-C listed, CSA Sanitation, CSA Gas Canada and CSA design certified US.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2014 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.